

KAYSAFE ENGINEERING LTD

Lawson Street
North Shields.
Newcastle, NE29 6TG
UNITED KINGDOM




Tel :00 44 (0) 1737 772210
Tel: (alt):00 44 (0) 191 259181
www.kaysafe.co.uk

e-mail – sales@kaysafe.co.uk

DATA SHEET 8 – FIG 777 300 Y TYPE STRAINER

SIZES:	½" to 1½" NB
PRESSURE RATING:	ANSI CLASS 300
END CONNECTIONS:	RF
STANDARDS:	ANSI B16.10. ANSI B16.5.
FINISH:	Manufactures' rust preventative standard paint on Carbon steel – As cast on Stainless steel (Special paint finish or lining available on request)
NDT:	Hydro test as standard (X Ray / MPI/DPI/PMI available on request)
CERTIFICATION	EN10204 3.1 (3.2 on request) NACE MR01-75 PED 2014/68/EU (CE marked where applicable) (Formerly 97/23/EC)

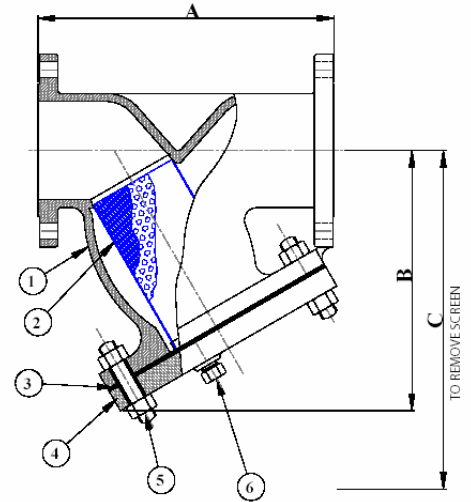

Dimensions approx (mm)

NB	A	B	C Screen removal	KG RF/RJ
½"	152	120	180	4.4
¾"	178	140	210	6.4
1"	203	170	240	8.4
1 ½"	229	180	270	14.6

NOTES

1. Drain plug – 3/8" NPT on ½" & ¾" NB. ½"NPT on 1" & 1 ½" NPT Flanged or SW drain available on request
2. Standard screen – 0.8 mm perf. Mesh & Perf changes available on request
3. Screens are not pressure retaining items and should not be exposed to a differential pressure in excess of 0.5 Bar G without our consent.
4. Manufactured in the EU from EU & world wide source materials

Materials of construction

ITEM		CARBON STEEL	STAINLESS STEEL
1	BODY (CAST)	ASTM A216 WCB	ASTM A352 LCC/LCB
2	SCREEN **	304/316 SS	316SS
3	COVER GASKET **	Spiral wound 316SS / Non asbestos	
4	COVER (CAST/FORGED)	ASTM A105N/ A216 WCB	ASTM A350 LF2/A352 LCC/LCB
5	BOLTING	B7 / 2H	L7 / Gr.4
6	DRAIN PLUG	ASTM A105N	ASTM A350 LF2/A182 F316
			ASTM A182 F316SS

NOTES

1. Other materials including CF8, CF3, LCB, LCC, CHROME-MOLY CS, MONEL, DUPLEX & SUPER DUPLEX and other special alloys available on request
2. Special gaskets / bolting available on request
3. SPARES AS MARKED **